



## *Industrial automation*



*Products overview*


# Products overview



IT series




VT series

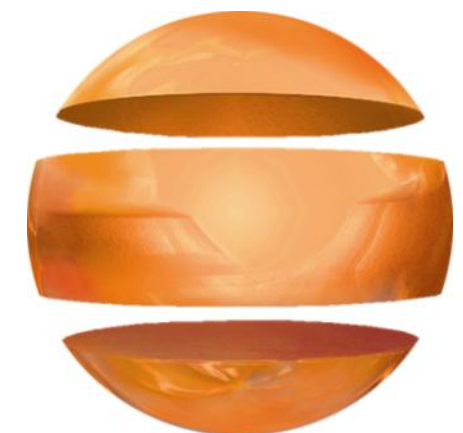

Polymath



# Products overview

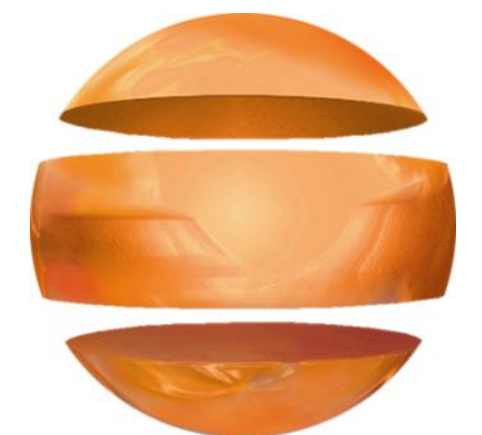

**Polymath**  
**Machine Edition**



# ***IT series***

# IT104G



|                   |                       |
|-------------------|-----------------------|
| <b>Display</b>    | <b>4,3" TFT</b>       |
| <b>Resolution</b> | <b>480x272</b>        |
| <b>Colors</b>     | <b>32 grey levels</b> |
| <b>CPU</b>        | <b>PXA270 312 MHz</b> |
| <b>RAM</b>        | <b>64 MB</b>          |
| <b>FLASH</b>      | <b>32 MB</b>          |

## Ports

**RS232/485 (SP1)**

**RS232/485 (SP2), CAN, DP, PN**

**Ethernet 10/100 (Rj45)**

**USB Host**



# IT104T



|                   |                       |
|-------------------|-----------------------|
| <b>Display</b>    | <b>4,3" TFT</b>       |
| <b>Resolution</b> | <b>480x272</b>        |
| <b>Colors</b>     | <b>65.000</b>         |
| <b>CPU</b>        | <b>PXA270 312 MHz</b> |
| <b>RAM</b>        | <b>64 MB</b>          |
| <b>FLASH</b>      | <b>32 MB</b>          |

## Ports

**RS232/485 (SP1)**

**RS232/485 (SP2), CAN, DP, PN**

**Ethernet 10/100 (Rj45)**

**USB Host**



**Polymath Advanced**



# IT105B



|                   |                       |
|-------------------|-----------------------|
| <b>Display</b>    | <b>5,7" STN</b>       |
| <b>Resolution</b> | <b>320x240</b>        |
| <b>Colors</b>     | <b>16 blue levels</b> |
| <b>CPU</b>        | <b>PXA270 312 MHz</b> |
| <b>RAM</b>        | <b>64 MB</b>          |
| <b>FLASH</b>      | <b>32 MB</b>          |

## Ports

**RS232/485 (SP1)**

**RS232/485 (SP2), CAN, DP, PN**

**Ethernet 10/100 (Rj45)**

**USB Host + USB  
device  
Secure Digital**



# IT105S



|                   |                       |
|-------------------|-----------------------|
| <b>Display</b>    | <b>5,7" STN</b>       |
| <b>Resolution</b> | <b>320x240</b>        |
| <b>Colors</b>     | <b>65.000</b>         |
| <b>CPU</b>        | <b>PXA270 312 MHz</b> |
| <b>RAM</b>        | <b>64 MB</b>          |
| <b>FLASH</b>      | <b>32 MB</b>          |

## Ports

**RS232/485 (SP1)**

**RS232/485 (SP2), CAN, DP, PN**

**Ethernet 10/100 (Rj45)**

**USB Host + USB**

**device  
Secure Digital**



**Polymath Advanced**



# IT105T



|                   |                       |
|-------------------|-----------------------|
| <b>Display</b>    | <b>5,7" TFT</b>       |
| <b>Resolution</b> | <b>320x240</b>        |
| <b>Colors</b>     | <b>65.000</b>         |
| <b>CPU</b>        | <b>PXA270 312 MHz</b> |
| <b>RAM</b>        | <b>64 MB</b>          |
| <b>FLASH</b>      | <b>32 MB</b>          |

## Ports

**RS232/485 (SP1)**

**RS232/485 (SP2), CAN, DP, PN**

**Ethernet 10/100 (Rj45)**

**USB Host + USB  
device  
Secure Digital**



**Polymath Advanced**

# IT107T



|                   |                       |
|-------------------|-----------------------|
| <b>Display</b>    | <b>7,5" TFT</b>       |
| <b>Resolution</b> | <b>640x480</b>        |
| <b>Colors</b>     | <b>65.000</b>         |
| <b>CPU</b>        | <b>PXA270 512 MHz</b> |
| <b>RAM</b>        | <b>64 MB</b>          |
| <b>FLASH</b>      | <b>32 MB</b>          |

## Ports

**RS232/485 (SP1)**

**RS232/485 (SP2), CAN, DP, PN**

**Ethernet 10/100 (Rj45)**

**USB Host + USB**

**device  
Secure Digital**



**Polymath Advanced**

# IT110T



|                   |                       |
|-------------------|-----------------------|
| <b>Display</b>    | <b>10,4" TFT</b>      |
| <b>Resolution</b> | <b>640x480</b>        |
| <b>Colors</b>     | <b>65.000</b>         |
| <b>CPU</b>        | <b>PXA270 512 MHz</b> |
| <b>RAM</b>        | <b>128 MB</b>         |
| <b>FLASH</b>      | <b>64 MB</b>          |

## Ports

**RS232/485 (SP1)**

**RS232/485 (SP2), CAN, DP, PN**

**2 x Ethernet 10/100 (Rj45)**

**2 x USB Host + USB**

**Secure Digital <sup>device</sup> + Compact Flash**

**Mic-in and Line-out**



**Polymath Advanced**



# IT112T



|                   |                       |
|-------------------|-----------------------|
| <b>Display</b>    | <b>12,1" TFT</b>      |
| <b>Resolution</b> | <b>800x600</b>        |
| <b>Colors</b>     | <b>65.000</b>         |
| <b>CPU</b>        | <b>PXA270 512 MHz</b> |
| <b>RAM</b>        | <b>128 MB</b>         |
| <b>FLASH</b>      | <b>64 MB</b>          |

## Ports

**RS232/485 (SP1)**

**RS232/485 (SP2), CAN, DP, PN**

**2 x Ethernet 10/100 (Rj45)**

**2 x USB Host + USB**

**Secure Digital + Compact Flash**

**Mic-in and Line-out**



**Polymath Advanced**



IT series

# IT115T



**Display** 15" TFT

**Resolution** 1024x768

**Colors** 65.000

**CPU** PXA270 512 MHz

**RAM** 128 MB

**FLASH** 64 MB

## Ports

RS232/485 (SP1)

RS232/485 (SP2), CAN, DP, PN

2 x Ethernet 10/100 (Rj45)

2 x USB Host + USB

Secure Digital + Compact Flash

Mic-in and Line-out



Polymath Advanced



# IT105B Keyboard



|                   |                       |
|-------------------|-----------------------|
| <b>Display</b>    | <b>5,7" STN</b>       |
| <b>Resolution</b> | <b>320x240</b>        |
| <b>Colors</b>     | <b>16 blue levels</b> |
| <b>CPU</b>        | <b>PXA270 312 MHz</b> |
| <b>RAM</b>        | <b>64 MB</b>          |
| <b>FLASH</b>      | <b>32 MB</b>          |

## Ports

**RS232/485 (SP1)**

**RS232/485 (SP2), CAN, DP**

**Ethernet 10/100 (Rj45)**

**USB Host + USB**

**device  
Secure Digital**





# IT105T Keyboard



|                   |                       |
|-------------------|-----------------------|
| <b>Display</b>    | <b>5,7" TFT</b>       |
| <b>Resolution</b> | <b>320x240</b>        |
| <b>Colors</b>     | <b>65.000</b>         |
| <b>CPU</b>        | <b>PXA270 312 MHz</b> |
| <b>RAM</b>        | <b>64 MB</b>          |
| <b>FLASH</b>      | <b>32 MB</b>          |

## Ports

**RS232/485 (SP1)**

**RS232/485 (SP2), CAN, DP**

**Ethernet 10/100 (Rj45)**

**USB Host + USB  
device  
Secure Digital**





# ***IT pro series***

# IT110T PRO



|                   |                       |
|-------------------|-----------------------|
| <b>Display</b>    | <b>10,4" TFT</b>      |
| <b>Resolution</b> | <b>640x480</b>        |
| <b>Colors</b>     | <b>65.000</b>         |
| <b>CPU</b>        | <b>PXA270 512 MHz</b> |
| <b>RAM</b>        | <b>128 MB</b>         |
| <b>FLASH</b>      | <b>64 MB</b>          |

## Ports

**RS232/485 (SP1)**

**RS232/485 (SP2), CAN, DP, PN**

**2 x Ethernet 10/100 (Rj45)**

**2 x USB Host + USB**

**Secure Digital + Compact Flash**


**Mic-in and Line-out**



**Polymath Advanced**



# IT112T PRO

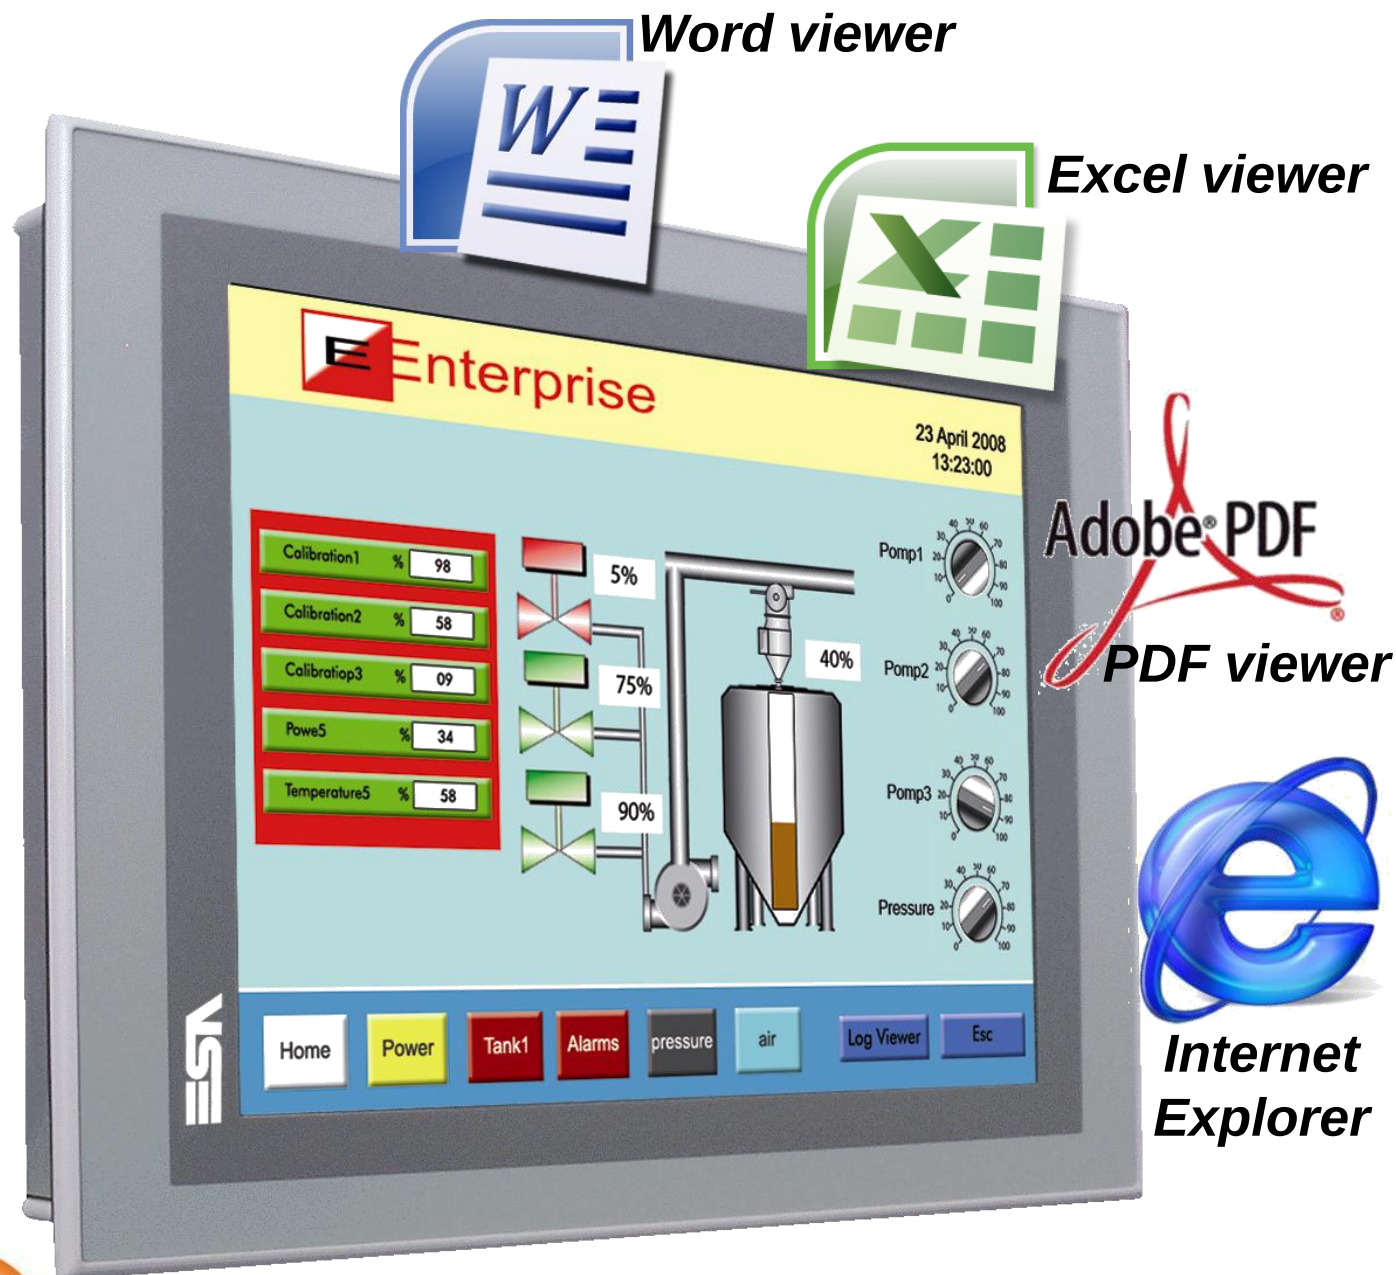


|                   |                       |
|-------------------|-----------------------|
| <b>Display</b>    | <b>12,1" TFT</b>      |
| <b>Resolution</b> | <b>800x600</b>        |
| <b>Colors</b>     | <b>65.000</b>         |
| <b>CPU</b>        | <b>PXA270 512 MHz</b> |
| <b>RAM</b>        | <b>128 MB</b>         |
| <b>FLASH</b>      | <b>64 MB</b>          |

## Ports

**RS232/485 (SP1)**  
**RS232/485 (SP2), CAN, DP, PN**  
**2 x Ethernet 10/100 (Rj45)**  
**2 x USB Host + USB device**  
**Secure Digital + Compact Flash**  
**Mic-in and Line-out**




# IT115T PRO

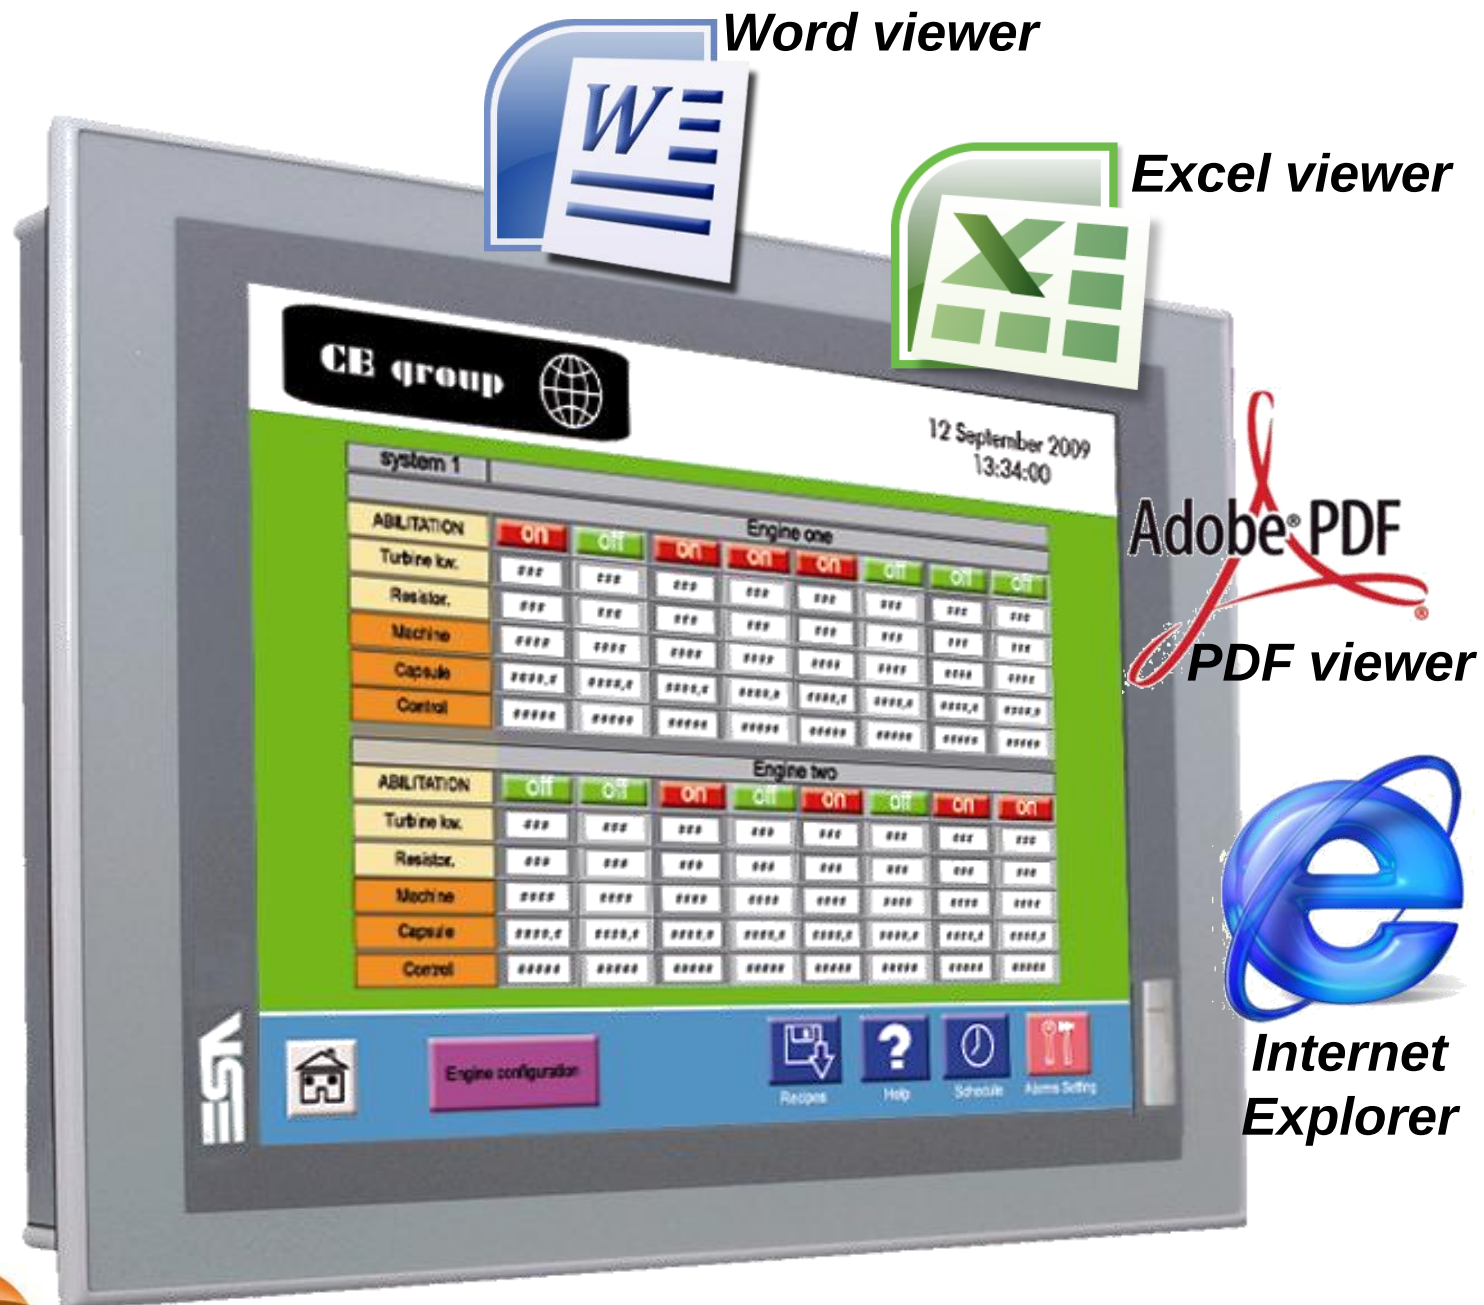

|            |                |
|------------|----------------|
| Display    | 15" TFT        |
| Resolution | 1024x768       |
| Colors     | 65.000         |
| CPU        | PXA270 512 MHz |
| RAM        | 128 MB         |
| FLASH      | 64 MB          |

## Ports

RS232/485 (SP1)  
 RS232/485 (SP2), CAN, DP, PN  
 2 x Ethernet 10/100 (Rj45)  
 2 x USB Host + USB  
 device  
 Secure Digital + Compact Flash  
 Mic-in and Line-out





## ***IT com-0 series***



# IT COM-0 series



# IT COM-0 series



- **No need for a driver**
- **Possibility to read and write ASCII sequences using a Vbscript engine**

```
!"#$%&'()*+,-./
0123456789:;<=>?
@ABCDEFGHIJKLMNO
PQRSTUVWXYZ[\]^_
`abcdefghijklmno
pqrstuvwxyz{|}~
```



## IT104T COM-0



|                   |                       |
|-------------------|-----------------------|
| <b>Display</b>    | <b>4,3" TFT</b>       |
| <b>Resolution</b> | <b>480x272</b>        |
| <b>Colors</b>     | <b>65.000</b>         |
| <b>CPU</b>        | <b>PXA270 312 MHz</b> |
| <b>RAM</b>        | <b>64 MB</b>          |
| <b>FLASH</b>      | <b>32 MB</b>          |

### Ports

**COM-0**

**RS232/485 (SP2), CAN, DP**


**Ethernet 10/100 (Rj45)**

**USB Host**





## IT105T COM-0

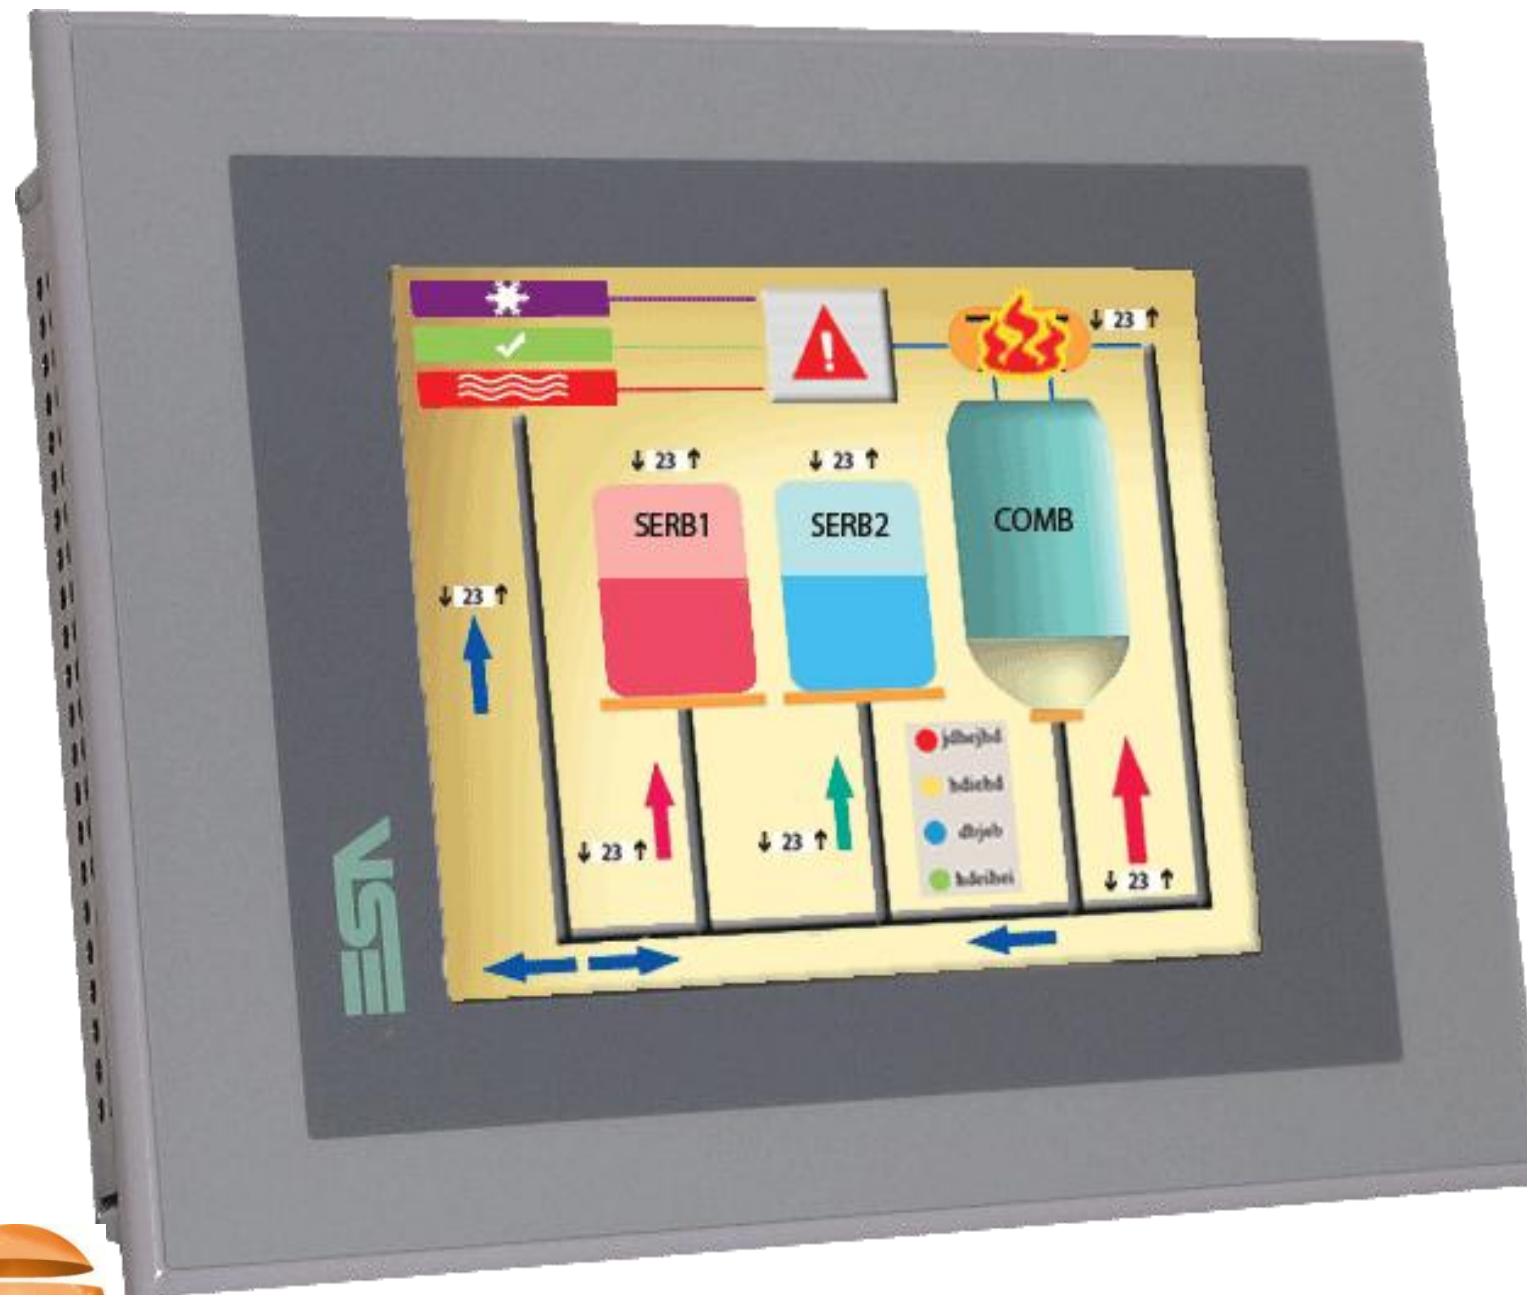

|                   |                       |
|-------------------|-----------------------|
| <b>Display</b>    | <b>5,7" TFT</b>       |
| <b>Resolution</b> | <b>320x240</b>        |
| <b>Colors</b>     | <b>65.000</b>         |
| <b>CPU</b>        | <b>PXA270 312 MHz</b> |
| <b>RAM</b>        | <b>64 MB</b>          |
| <b>FLASH</b>      | <b>32 MB</b>          |

### Ports

**COM-0**

**RS232/485 (SP2), CAN, DP**

**Ethernet 10/100 (Rj45)**

**USB Host + USB  
device  
Secure Digital**



# IT107T COM-0



|                   |                       |
|-------------------|-----------------------|
| <b>Display</b>    | <b>7,5" TFT</b>       |
| <b>Resolution</b> | <b>640x480</b>        |
| <b>Colors</b>     | <b>65.000</b>         |
| <b>CPU</b>        | <b>PXA270 512 MHz</b> |
| <b>RAM</b>        | <b>64 MB</b>          |
| <b>FLASH</b>      | <b>32 MB</b>          |

## Ports

**COM-0**


**RS232/485 (SP2), CAN, DP**

**Ethernet 10/100 (Rj45)**

**USB Host + USB  
device  
Secure Digital**



**Polymath Advanced**

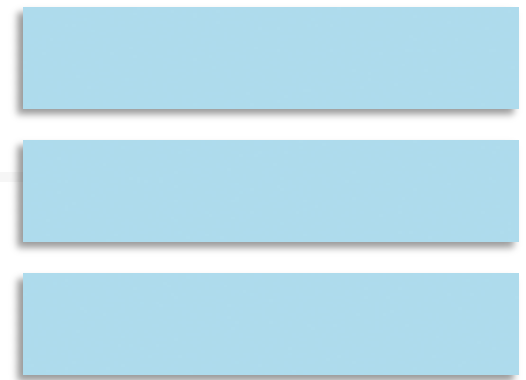

# ***XT series***



# XT104T



|                   |                       |
|-------------------|-----------------------|
| <b>Display</b>    | <b>4,3" TFT</b>       |
| <b>Resolution</b> | <b>480x272</b>        |
| <b>Colors</b>     | <b>65.000</b>         |
| <b>CPU</b>        | <b>PXA270 312 MHz</b> |
| <b>RAM</b>        | <b>64 MB</b>          |
| <b>FLASH</b>      | <b>32 MB</b>          |

## *Ports*

**COM-0**

**Ethernet 10/100 (Rj45)**

**USB Host**



**Windows CE 5.0 Professional**

XT series

# XT105B



|                   |                |
|-------------------|----------------|
| <i>Display</i>    | 5,7" STN       |
| <i>Resolution</i> | 320x240        |
| <i>Colors</i>     | 16 blue levels |
| <i>CPU</i>        | PXA270 520 MHz |
| <i>RAM</i>        | 64 MB          |
| <i>FLASH</i>      | 32 MB          |


## Ports

COM-0  
Ethernet 10/100 (Rj45)  
USB Host + USB  
Secure Digital



Windows CE 5.0 Professional

# XT105S

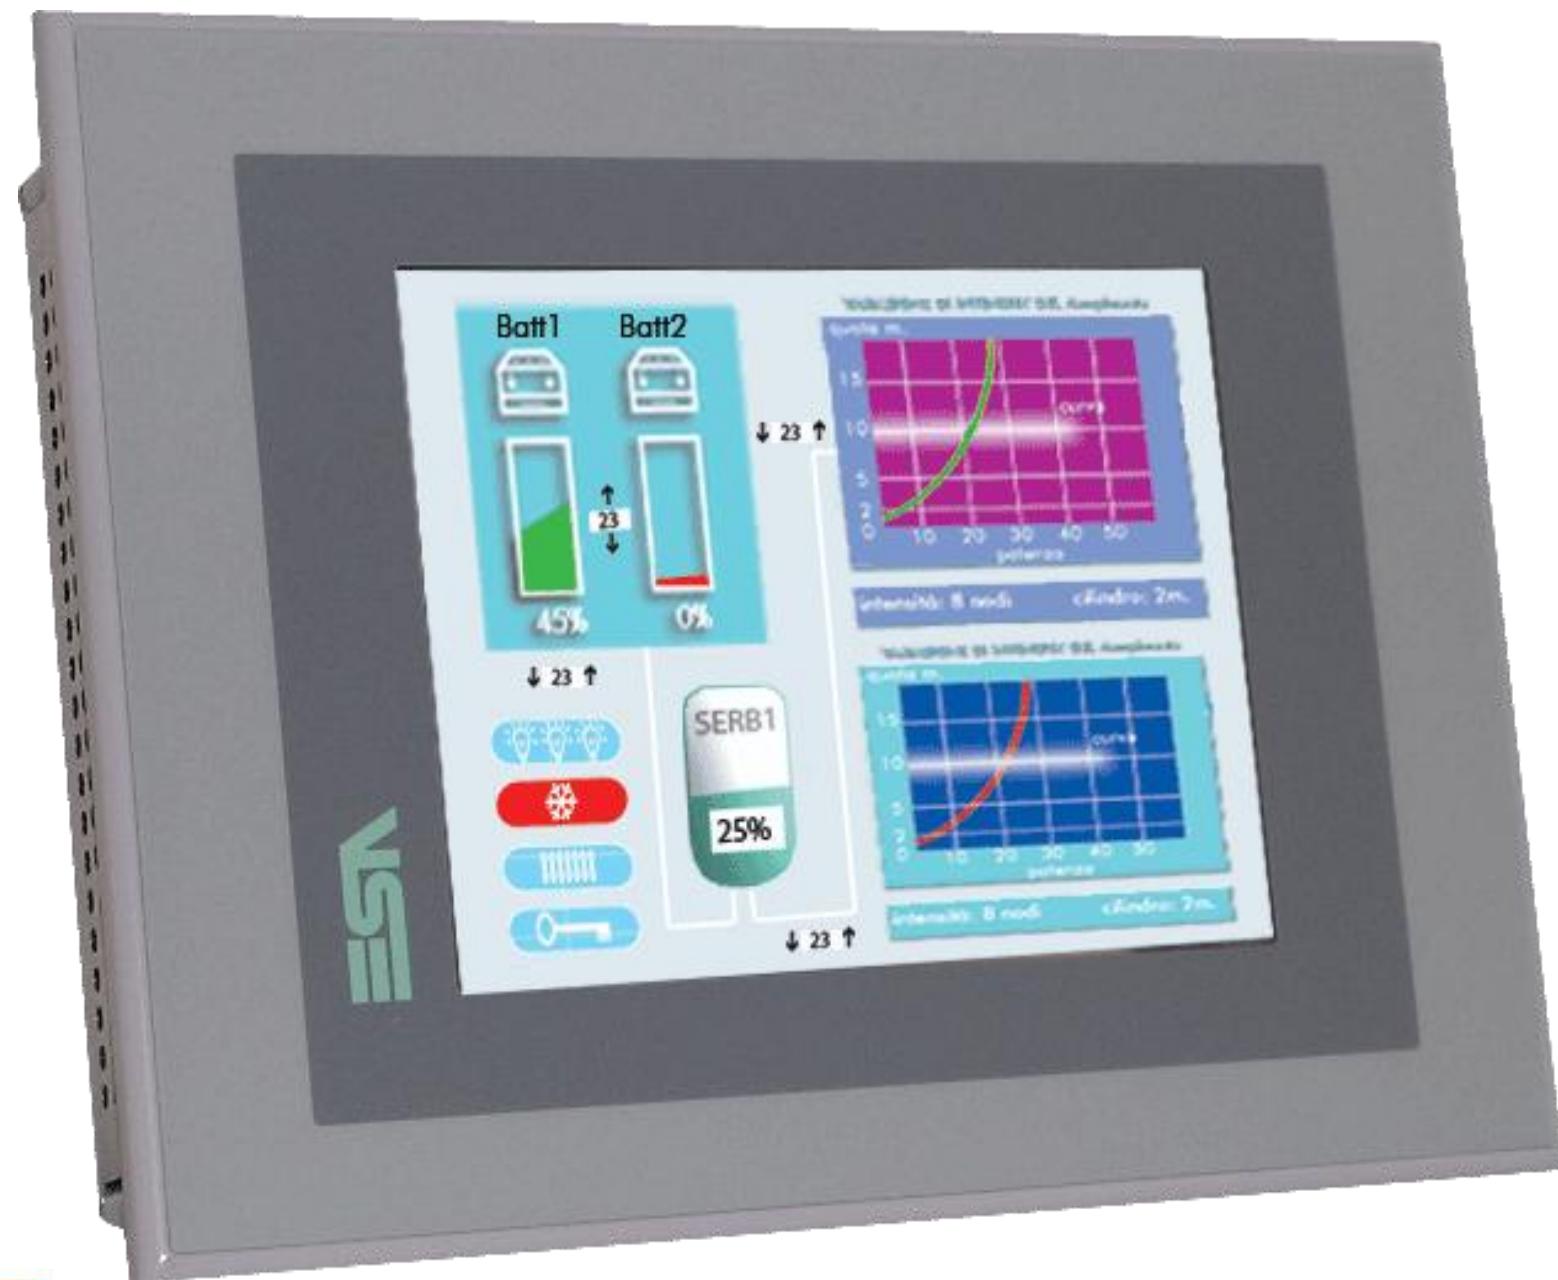

|                   |                       |
|-------------------|-----------------------|
| <b>Display</b>    | <b>5,7" STN</b>       |
| <b>Resolution</b> | <b>320x240</b>        |
| <b>Colors</b>     | <b>65.000</b>         |
| <b>CPU</b>        | <b>PXA270 520 MHz</b> |
| <b>RAM</b>        | <b>64 MB</b>          |
| <b>FLASH</b>      | <b>32 MB</b>          |

## Ports

- COM-0
- Ethernet 10/100 (Rj45)
- USB Host + USB Device
- Secure Digital




Windows CE 5.0 Professional



XT series

# XT105T

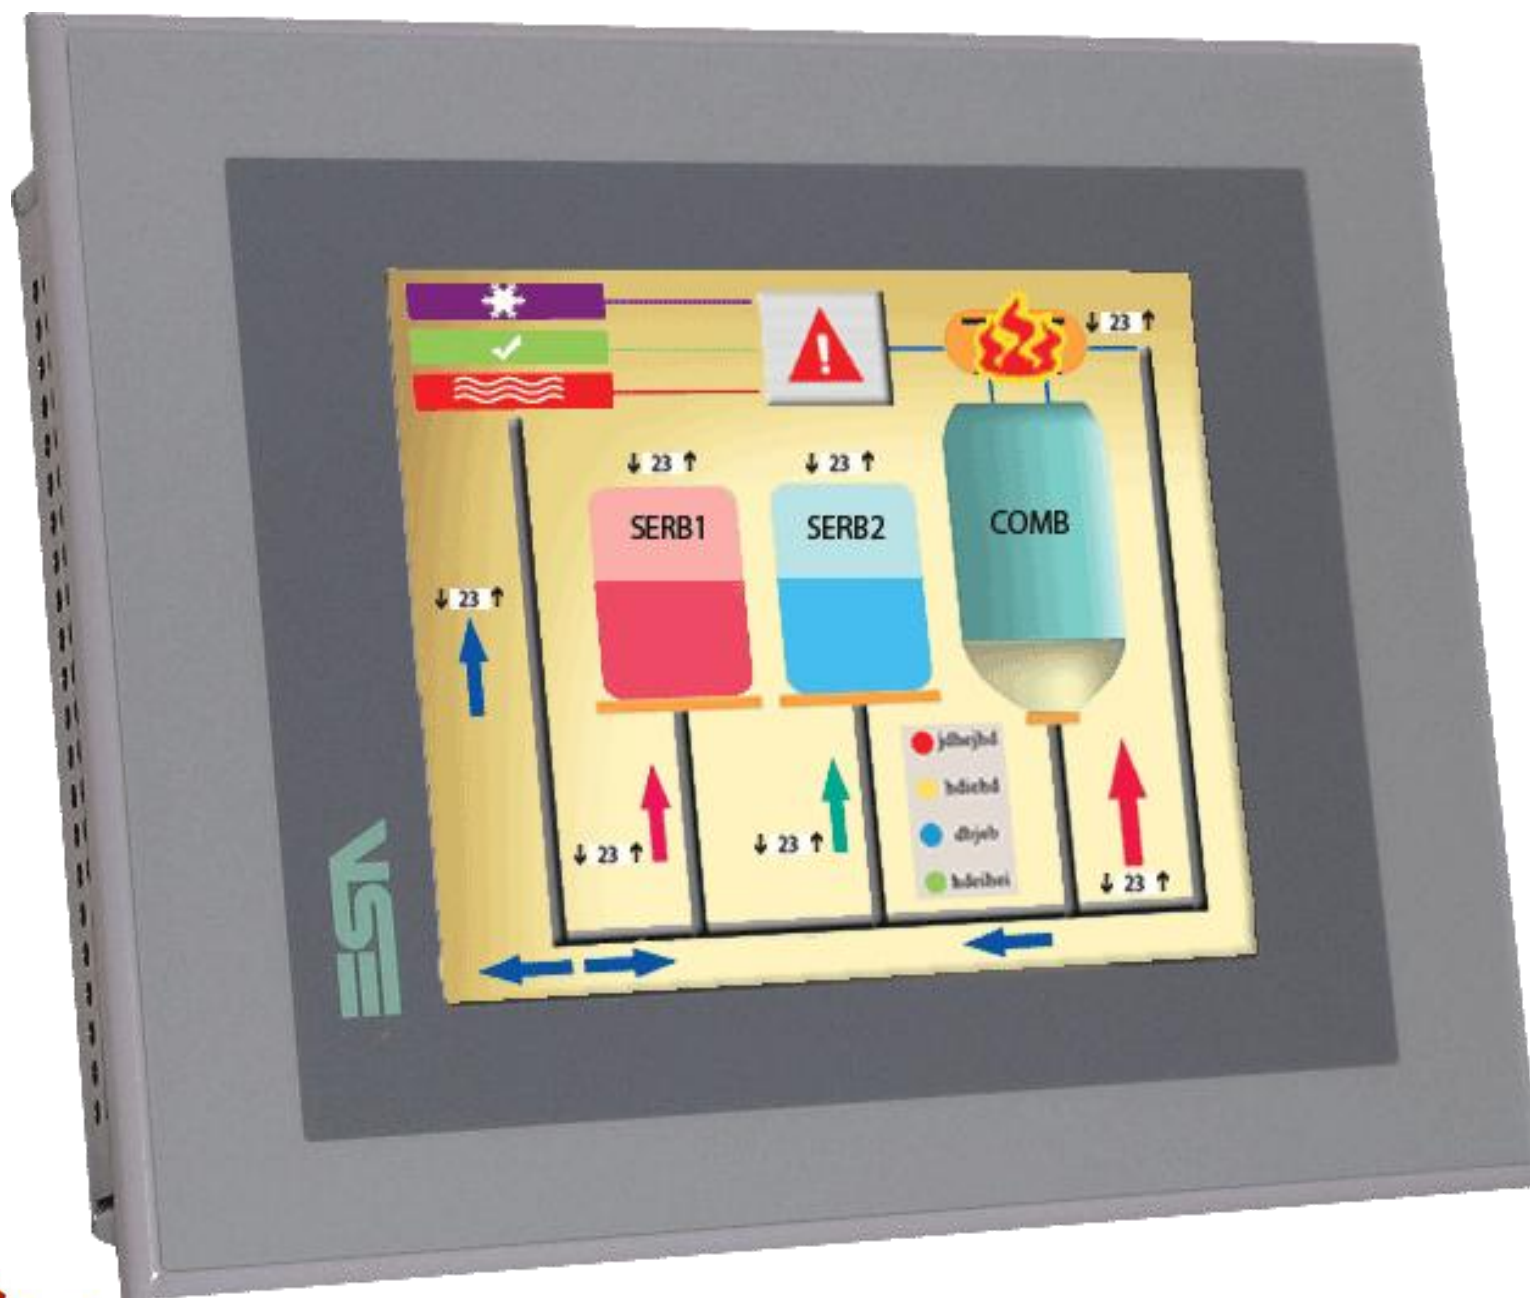

|                   |                       |
|-------------------|-----------------------|
| <b>Display</b>    | <b>5,7" TFT</b>       |
| <b>Resolution</b> | <b>320x240</b>        |
| <b>Colors</b>     | <b>65.000</b>         |
| <b>CPU</b>        | <b>PXA270 520 MHz</b> |
| <b>RAM</b>        | <b>64 MB</b>          |
| <b>FLASH</b>      | <b>32 MB</b>          |

## Ports

COM-0  
Ethernet 10/100 (Rj45)  
USB Host + USB  
Device  
Secure Digital



Windows CE 5.0 Professional

*XT series*

# XT107T




|                   |                       |
|-------------------|-----------------------|
| <b>Display</b>    | <b>7,5" TFT</b>       |
| <b>Resolution</b> | <b>640x480</b>        |
| <b>Colors</b>     | <b>65.000</b>         |
| <b>CPU</b>        | <b>PXA270 512 MHz</b> |
| <b>RAM</b>        | <b>64 MB</b>          |
| <b>FLASH</b>      | <b>32 MB</b>          |

## *Ports*

**COM-0**  
**Ethernet 10/100 (Rj45)**  
**USB Host + USB**  
**Secure Digital**



**Windows CE 5.0 Professional**

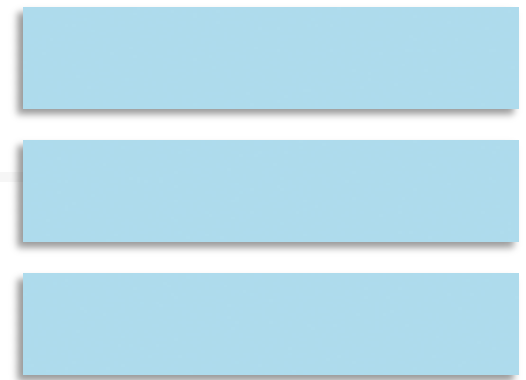


# ***XS series***



XS series

# XS612

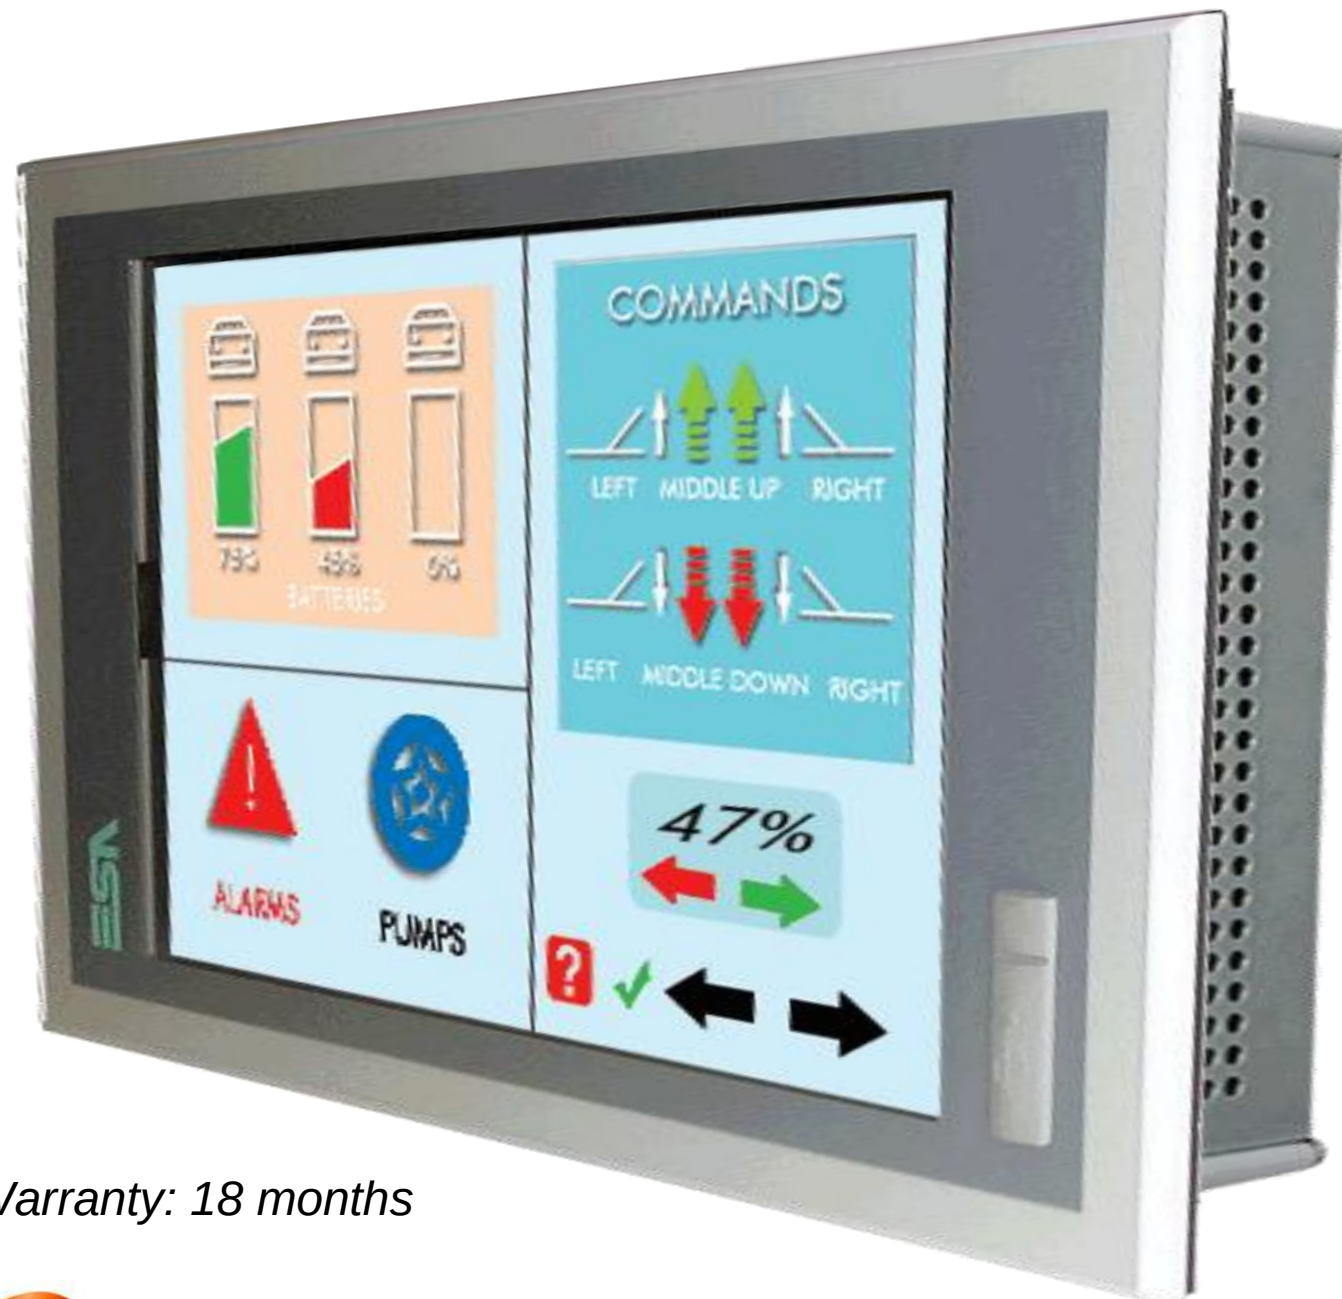

Warranty: 18 months



**Windows XP Embedded**

**Windows XP Professional Multilanguage**

|                       |                                                                                                                                                                                                                                  |
|-----------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Display</b>        | <b>12,1" TFT</b>                                                                                                                                                                                                                 |
| <b>Resolution</b>     | <b>800x600</b>                                                                                                                                                                                                                   |
| <b>Colors</b>         | <b>262.000</b>                                                                                                                                                                                                                   |
| <b>CPU</b>            | <b>Celeron M 1 GHz FANLESS<br/>Pentium M 1.6 GHz</b>                                                                                                                                                                             |
| <b>RAM</b>            | <b>512 MB to 1 GB</b>                                                                                                                                                                                                            |
| <b>Internal Drive</b> | <b>Compact Flash 2/4 GB<br/>HD 160 GB (SATA)<br/>Solid State Disk 8 GB (SATA)</b>                                                                                                                                                |
| <b>Ports</b>          | <b>PCI slot<br/>RS232 + RS232/422/485<br/>Additional 2 x RS232 (PCI)<br/>Parallel port (PCI)<br/>5 x USB 2.0 (1 frontal)<br/>Ethernet 10/100 + 10/100/1000 (PCI)<br/>PS/2 keyboard + PS/2 mouse<br/>MicIN + LineIN + LineOUT</b> |

# XS615



Warranty: 18 months




Windows XP Embedded  
Windows XP Professional Multilanguage

|                |                                                                                                                                                     |
|----------------|-----------------------------------------------------------------------------------------------------------------------------------------------------|
| Display        | 15" TFT                                                                                                                                             |
| Resolution     | 1024x768                                                                                                                                            |
| Colors         | 262.000                                                                                                                                             |
| CPU            | Celeron M 600 MHz<br>Celeron M 600 MHz FANLESS<br>Pentium M 1.1 GHz<br>Pentium M 1.6 GHz                                                            |
| RAM            | 256 MB to 1 GB                                                                                                                                      |
| Internal Drive | Compact Flash 2/4 GB<br>HD 80 GB (SATA)<br>Solid State Disk 8/32 GB (SATA)                                                                          |
| Optical Drive  | CD-ROM                                                                                                                                              |
| Ports          | 2 x PCI slot<br>RS232 + 2 x RS232 (PCI)<br>Parallel port<br>3 x USB 2.0 (1 frontal)<br>Ethernet 10/100 + 10/100/1000 (PCI)<br>PS/2 keyboard & mouse |



XS series

# XS615

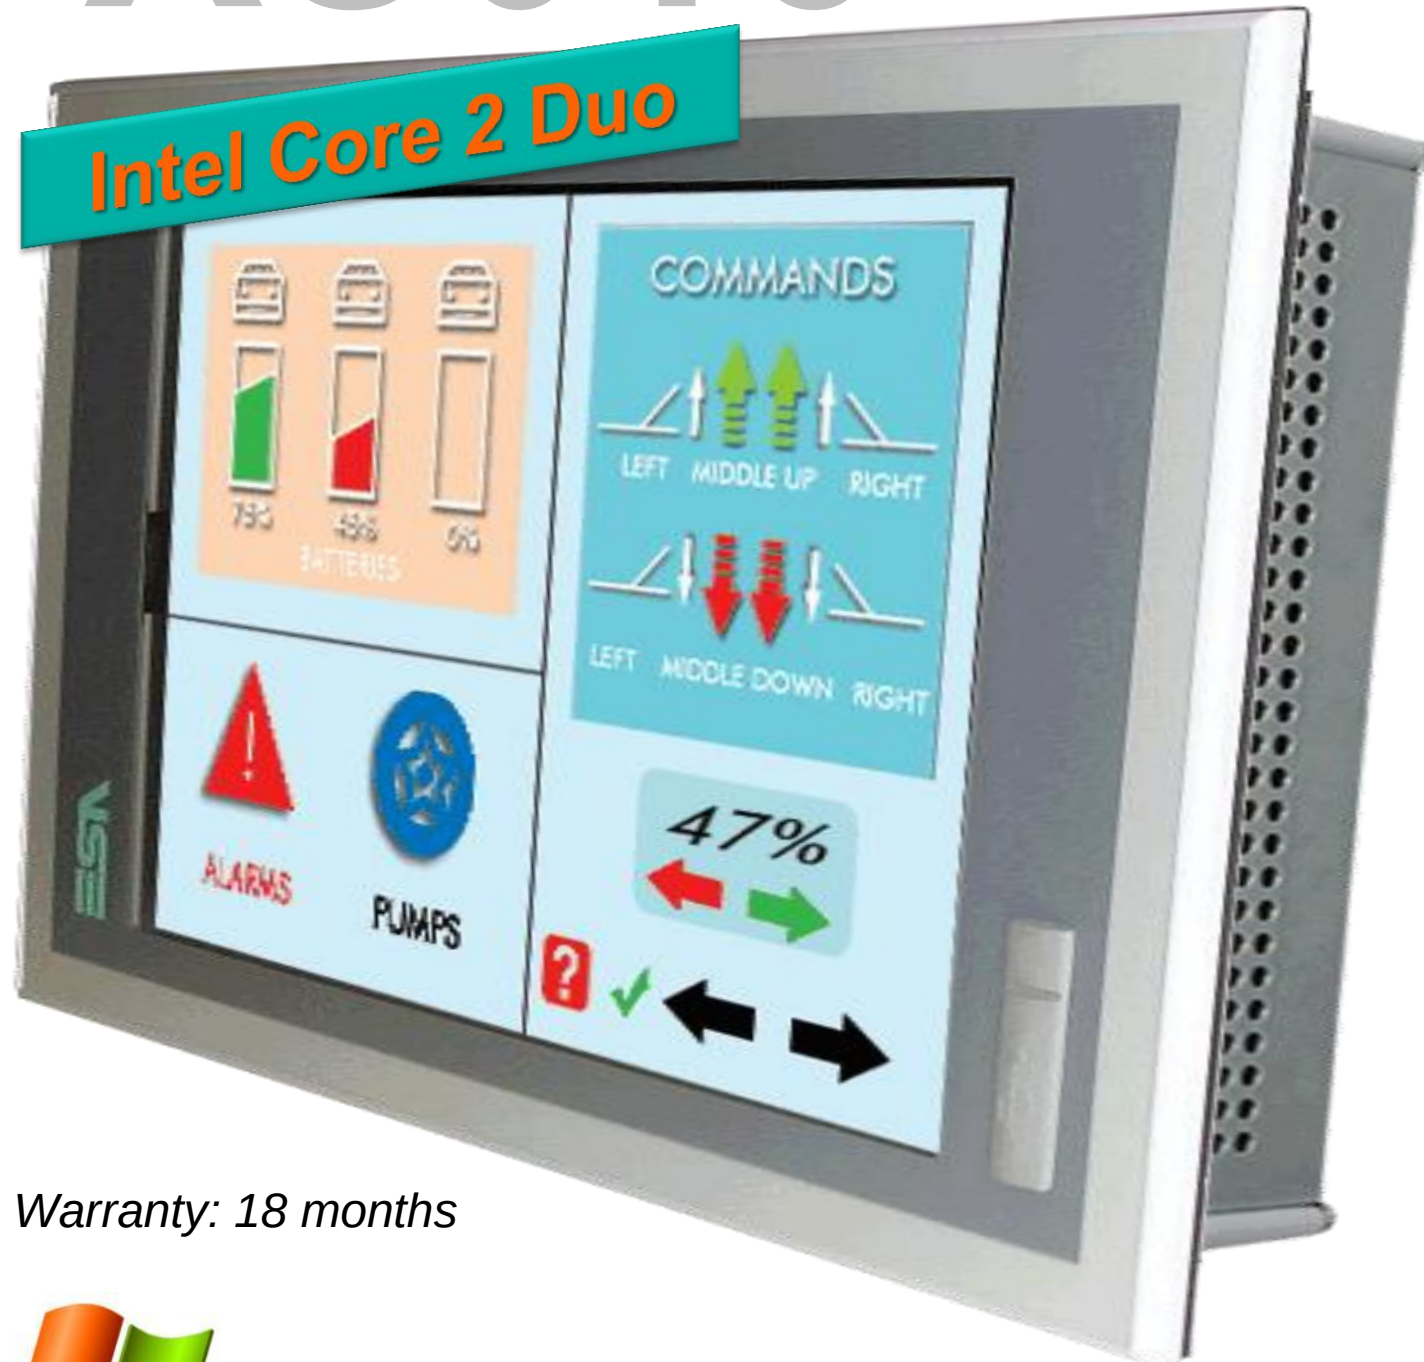

Warranty: 18 months



Windows XP Embedded


Windows XP Professional Multilanguage

|                |                                                                                                                                                                                                                   |
|----------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Display        | 15" TFT                                                                                                                                                                                                           |
| Resolution     | 1024x768                                                                                                                                                                                                          |
| Colors         | 262.000                                                                                                                                                                                                           |
| CPU            | Core 2 Duo 2.2 GHz                                                                                                                                                                                                |
| RAM            | 512 MB to 2 GB                                                                                                                                                                                                    |
| Internal Drive | Compact Flash 2/4 GB<br>HD 160 GB<br>Solid State Disk 8 GB                                                                                                                                                        |
| Optical Drive  | DVD-ROM                                                                                                                                                                                                           |
| Ports          | PCI slot<br>RS232 + RS232/422/485<br>Additional 2 x RS232 (PCI)<br>Parallel port (PCI)<br>5 x USB 2.0 (1 frontal)<br>2 x Ethernet 10/100/1000<br>PS/2 keyboard + PS/2 mouse<br>MicIN + LineIN + 3 LineOUT + SPDIF |



XS series

# XS619

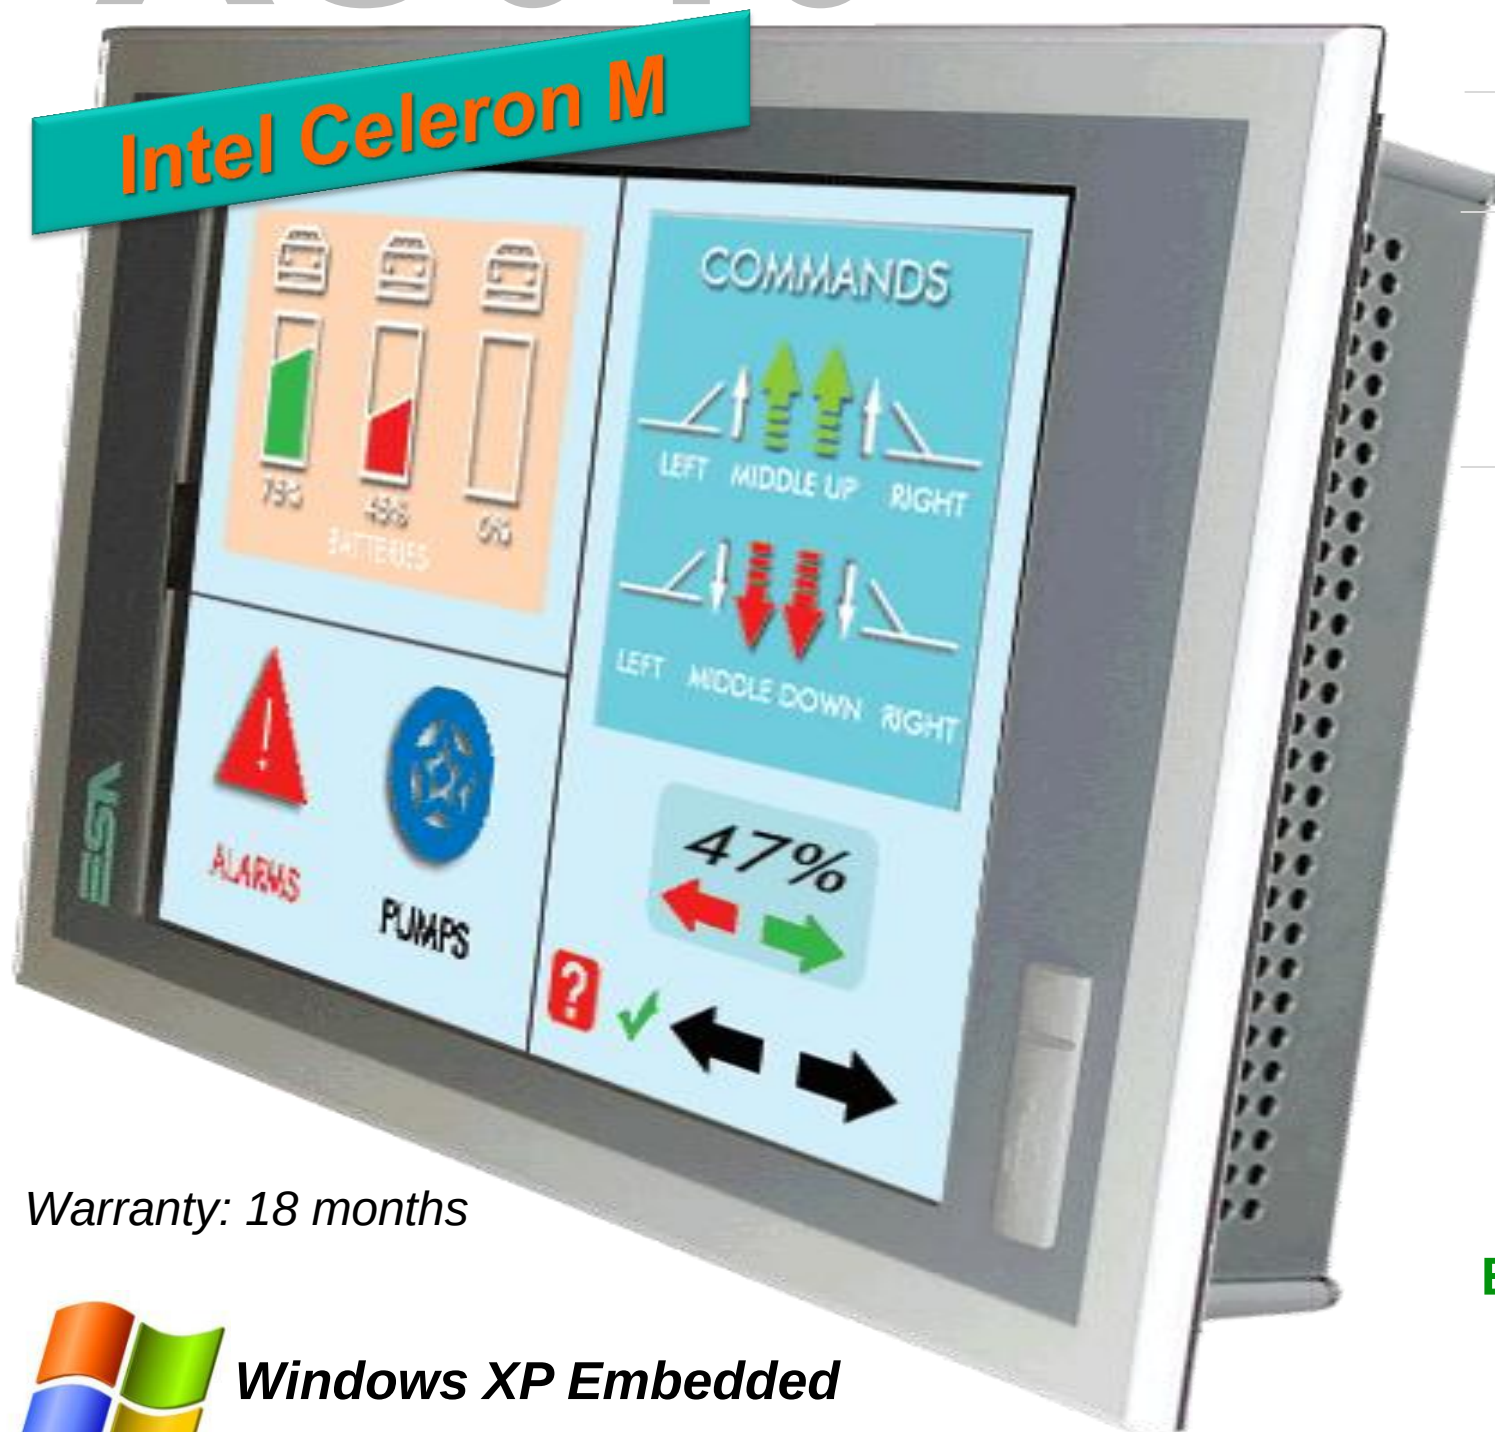

Warranty: 18 months




**Windows XP Embedded**

**Windows XP Professional Multilanguage**

|                       |                                                                                                                                                                                                                                  |
|-----------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Display</b>        | <b>19" TFT</b>                                                                                                                                                                                                                   |
| <b>Resolution</b>     | <b>1280x1024</b>                                                                                                                                                                                                                 |
| <b>Colors</b>         | <b>262.000</b>                                                                                                                                                                                                                   |
| <b>CPU</b>            | <b>Celeron M 1 GHz FANLESS</b>                                                                                                                                                                                                   |
| <b>RAM</b>            | <b>512 MB to 1 GB</b>                                                                                                                                                                                                            |
| <b>Internal Drive</b> | <b>Compact Flash 2/4 GB<br/>HD 160 GB (SATA)<br/>Solid State Disk 8 GB (SATA)</b>                                                                                                                                                |
| <b>Optical Drive</b>  | <b>DVD-ROM</b>                                                                                                                                                                                                                   |
| <b>Ports</b>          | <b>PCI slot<br/>RS232 + RS232/422/485<br/>Additional 2 x RS232 (PCI)<br/>Parallel port (PCI)<br/>5 x USB 2.0 (1 frontal)<br/>Ethernet 10/100 + 10/100/1000 (PCI)<br/>PS/2 keyboard + PS/2 mouse<br/>MicIN + LineIN + LineOUT</b> |

# XS619

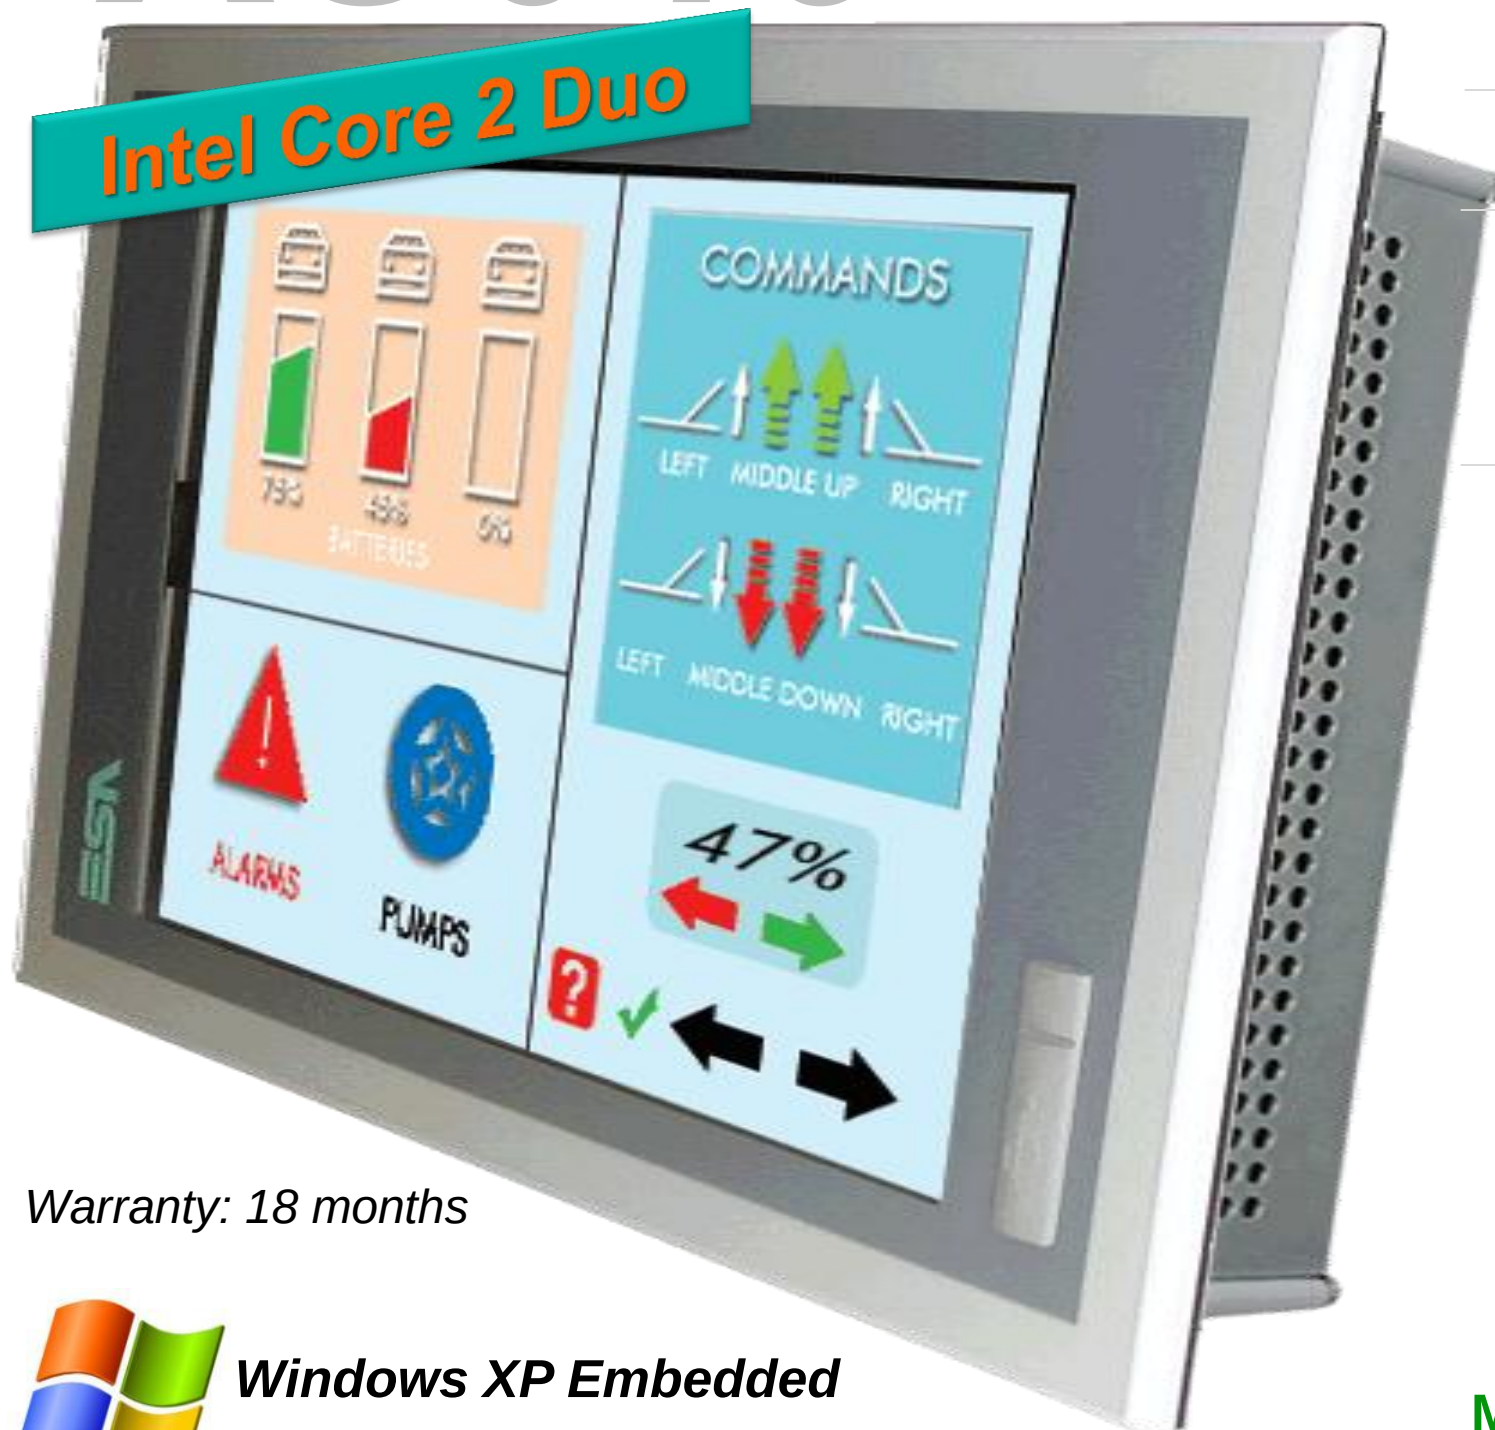

Warranty: 18 months

 **Windows XP Embedded**  
**Windows XP Professional Multilanguage**

|                       |                                                                                                                                                                                                                                 |
|-----------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Display</b>        | <b>19" TFT</b>                                                                                                                                                                                                                  |
| <b>Resolution</b>     | <b>1280x1024</b>                                                                                                                                                                                                                |
| <b>Colors</b>         | <b>262.000</b>                                                                                                                                                                                                                  |
| <b>CPU</b>            | <b>Core 2 Duo 2.2 GHz</b>                                                                                                                                                                                                       |
| <b>RAM</b>            | <b>512 MB to 2 GB</b>                                                                                                                                                                                                           |
| <b>Internal Drive</b> | <b>Compact Flash 2/4 GB<br/>HD 160 GB (SATA)<br/>Solid State Disk 8 GB (SATA)</b>                                                                                                                                               |
| <b>Optical Drive</b>  | <b>DVD-ROM</b>                                                                                                                                                                                                                  |
| <b>Ports</b>          | <b>PCI slot<br/>RS232 + RS232/422/485<br/>Additional 2 x RS232 (PCI)<br/>Parallel port (PCI)<br/>5 x USB 2.0 (1 frontal)<br/>2 x Ethernet 10/100/1000<br/>PS/2 keyboard + PS/2 mouse<br/>MicIN + LineIN + 3 LineOUT + SPDIF</b> |



# XS595


***65.000 Colors TFT  
800x600 (12,1")***



# XS585

***65.000 Colors TFT  
640x480 (10,4")***



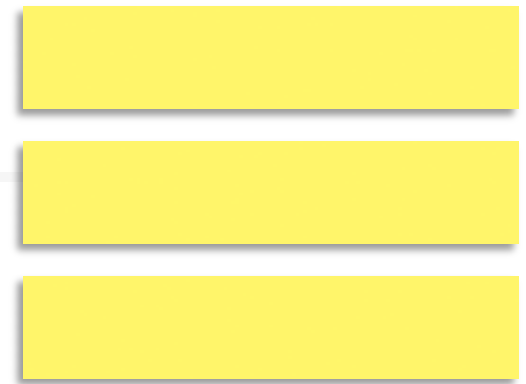

# ***VT series***

# VT series



**VT50**  
**LCD 20x2**  
**8 Keys**



**VT150W**  
**LCD 20x4**  
**25 Keys**



**VT160W**  
**LCD 20x4**  
**43 Keys**



**VT60**  
**LCD 20x4**  
**6 Keys**



**VT170W**  
**LCD 20x4**  
**36 Keys**



**VT190W**  
**LCD 40x4**  
**49 Keys**

# Text terminals

# VT series



**VT300W**  
*Mono STN*  
**240x64**  
**49 Keys**



**VT320W**  
*16 colors STN*  
**320x240 (5,7")**  
**52 Keys**



**VT310W**  
*Mono STN*  
**240x128 (5,5")**  
**46 Keys**



**VT330W**  
*256 colors TFT*  
**640x480 (10,4")**  
**72 Keys**

# Graphic terminals





**VT155W**

**4 Grey tones STN LCD**

**240x128 (4")**

**VT185W**

**16 Colors TFT**

**320x240 (3,6")**



# Touch screen terminals

# VT series

**VT555W**

***Mono STN***

***240x128 (5,5")***



**VT525W**

***16 colors STN***

***320x240 (5,7")***



**VT560W**

***8 Blue tones***

***16 Colors STN***

***320x240 (5,7")***



**VT515W**

***4 Blue tones STN***

***320x240 (5,7")***



**VT505W**

***4 Blue tones STN***

***320x240 (5,7")***



# Touch screen terminals

# VT series



**VT575W**  
**256 Colors STN**  
**640x480 (7,5")**

**VT565W**  
**8 Grey tones**  
**256 Colors STN**  
**320x240 (5,7")**



**VT585WB**  
**256 Colors TFT**  
**640x480 (10,4")**



**VT585W**  
**256 Colors TFT**  
**800x600 (8,4")**



**VT595W**  
**256 Colors TFT**  
**800x600 (12,1")**

# Touch screen terminals



# VT series



## VT525H

***16 Colors STN LCD***

***320x240 (5,7")***

***10 Touches function***

## VT505H

***4 Blue tones STN LCD***

***320x240 (5,7")***

***10 Touches function***



# Hand-held terminals



# ***PC monitors***

# DISPTS015



**Display**

**15" TFT**

**Resolution**

**1024x768**

**Colors**

**262.000**

**Ports**

**VGA input**

**DVI input**

**S-Video input**

**USB for touch screen**

**RS232 for touch screen**

**USB extension**



# DISPTS019



**Display**

**19" TFT**

**Resolution**

**1280x1024**

**Colors**

**262.000**

## Ports

- VGA input
- DVI input
- S-Video input
- USB for touch screen
- RS232 for touch screen
- USB extension



# ***Industrial PC***

# PC series



**PC2000**

***COM 1-2-3/LPT***

***2 x USB***

***Ethernet***

***VGA / PS2 / Sound***

***4 x PCI or 3 x ISA slot***

***HDD, FDD, CD-Rom***

***24 VDC or 230 VDC***





# ***Accessories***

# USB adapter for Polymath Machine Edition

## XS61x / PC USB adapter

**Power**

**24 Volt**



**Available configurations:**  
SP (serial driver and MPI)  
Profibus DP  
CAN



**Polymath Advanced**

# Power supply

**Power**

**110-220 Volt 50/60 Hz**

## XS61x / IT / XT / VT

External power supply

